




4680C

IKALL SERIES A/V COLOR UNIT. SIMPLEBUS

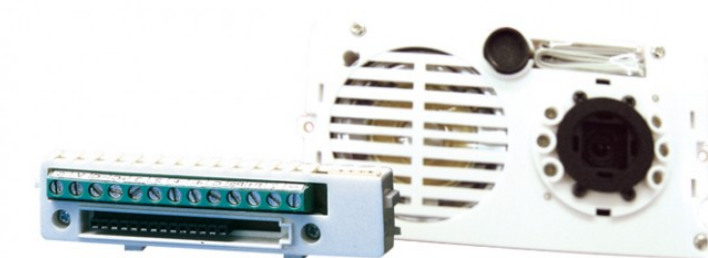

SB1

Simplebus 2 system audio-video unit with terminal block complete with front-adjustable wide-angle 1/3" CCD color camera and LED camera illumination. Complete with terminal block and digital audio management system with Eco-cancelling, watertight loudspeaker and electret microphone, loudspeaker volume can be adjusted from the front. Complete with microprocessor and DIP SWITCH with 8 positions for programming calls to users. Audio-visual indications for disabled individuals assistance request can be activated via programming. 33Vdc power supply via special power supply unit Art. 1595. On-board electronic lockrelease function (3A), plus C, NC, NO 10A relay contacts. For use in modules Art. 33410, 33411 and 33412. Dimensions: 4"x2.2"x1.5". Compatible with all Simplebus 2 functions and products. Allows call addressing for up to 120000 users. Timed lock-release input and door open indication.



4680C

IKALL SERIES A/V COLOR UNIT. SIMPLEBUS

MAIN FEATURES

Camera	Colors
Horizontal resolution (tvl)	540
Minimum illumination (lux)	0.35
Lens size (inch) (mm)	3.60
Camera orientation	Yes
Clamps	L L V+V- RTE DO PR GND SE COM NC NO
Operating temperature (°F) (°C)	-25 ÷ 55
Video output	1Vpp 75PAL

SOFTWARE/FIRMWARE SPECIFICATIONS

Video resolution (H x V - pixel)	500x582
----------------------------------	---------

HARDWARE SPECIFICATIONS

Visual signalling	Yes
Acoustic signalling	Yes
Speech synthesis	Yes

GENERAL DATA

Height (inch) (mm)	55.00
Width (inch) (mm)	102.00
Depth (inch) (mm)	38.00

COMPATIBILITY

Simplebus 2 audio/video system	Yes
--------------------------------	-----



4680C

IKALL SERIES A/V COLOR UNIT. SIMPLEBUS

ELECTRICAL SPECIFICATIONS

Door release (dry contact bridge)	Yes
Door release (direct current output)	Yes